

ADAPTOR PLATES


MicroFlex adaptor-plates for MicroFlow and MicroFlow Touch

MicroFlex adaptor plates

All MicroFlow machines must be fitted with adapter-plate set.
A set consists of an upper and lower halves which together forms a compact airtight unit around duct and fiber.



The MicroFlex adapter plates are flexible in duct- and fibercable sizes
5-16 mm duct OD
0.8-5.5 mm fiber / cable.

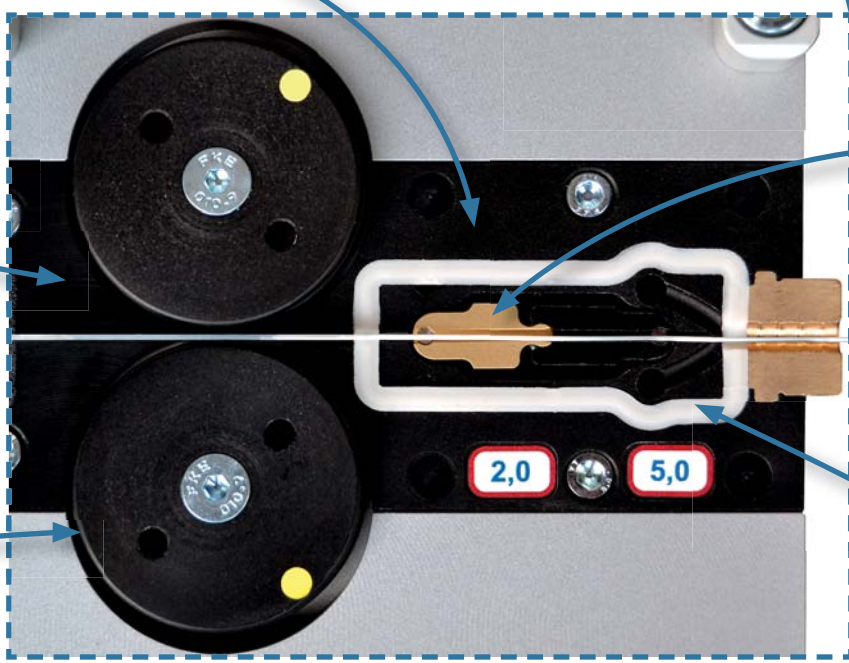

Inlet guides:
1.5-6.0 mm.

Rubberrings
for pushing wheels:
2.0-6.0 mm.

Buckle-detection:
Male and female
1.5-4.0 mm.

MicroFlex
gaskets for
fiber / cable
0.8-5.5 mm
and for duct
5-16 mm OD.

Adapter-plate set includes:

- Buckle detection, size optional.
- Pushingwheels with rubberrings.
- Inlet guides.

**PLEASE
INFORM
CABLE SIZE AND
DUCT SIZE
WHEN
ORDERING!**

