

# DATA SHEET


## CABLE GUIDE ROLLER - shaft inside edge

for shafts, shoulders or steps - roller diameter Ø 130 mm

Item no.: 10156



Detailed images:

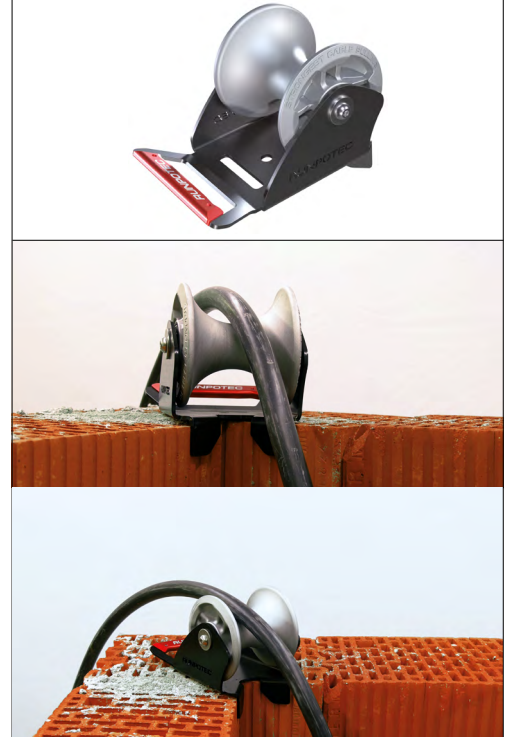

### DATA

Recommended trade price in EURO / excluding VAT

ITEM NO	10156
PRICE €	€ 75,00
DIMENSIONS	L 220.5 x W 155 x H 163 mm
LOAD BEARING CAPACITY	4.500 kg
WEIGHT	3,03 kg
MATERIAL	Roller: Aluminium Frame: Steel
ROLLER DIAMETER	Ø 130 mm
MAX CABLE DIAMETER	Ø 100 mm
EAN-Code	9120045476378

### ADVANTAGES

- ✓ Aluminium heavy-duty rollers with stainless steel ball bearings
- ✓ Robust metal frame
- ✓ CDP coating
- ✓ Ergonomic aluminium carrying handle
- ✓ Load bearing capacity 4.500 kg

### DESCRIPTION

The cable guide roller - shaft inside edge is ideally suited for mounting on the edge of a shaft or on steps to pull cables gently around corners with the least possible resistance. A right-angled stop is provided by the two lugs. It can be secured in place with a belt or screws via the assembly opening. The lightweight and highly robust design reduces the effort required with optimum success. The high-quality die-cast aluminium rollers with integrated ball bearing and the sturdy powder-coated steel frame guarantee a long service life. Ergonomic aluminium handle - Load capacity 4500 kg

**Optimum area of application:** for mounting on the edge of a shaft or on steps to pull cables gently around corners

**Application video:** a short, very informative application video can be viewed by scanning the QR code or on [www.runpotec.com](http://www.runpotec.com).

**Scope of delivery:** 1 x cable guide roller - shaft inside edge

### INFORMATION

#### Optional accessories:

#### POLYESTER PULLING ROPE incl. reel

- Rope: Ø 10 mm  
Item no: 10167 - 120 m  
Item no: 10168 - 200 m  
Rope: Ø 12 mm  
Item no: 10120 - 150 m  
Item no: 10121 - 200 m  
Item no: 10122 - 300 m  
Item no: 10123 - 350 m



[Click here Productinformation](#)

#### Related pulling system:

#### Capstan winch CW 800 E + trolley

Item no: 10138

[Click here Productinformation](#)

