

DATA SHEET



REPLACEMENT GLASS FIBRE ROD

for steel cage Ø 11 mm

Item no.: 20386 | 20417 | 20418 | 20419 | 20420 | 20421



Repair instruction:

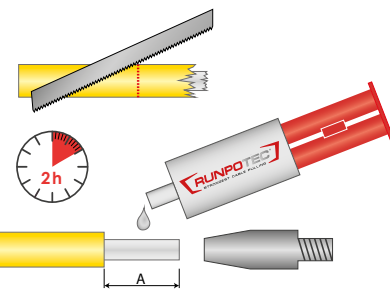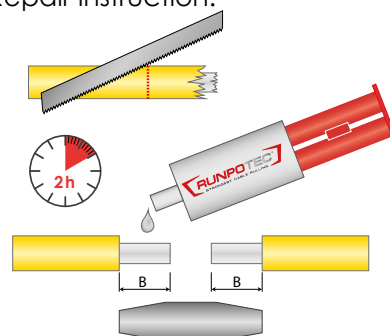

Ø mm	A	B
11 mm	66 mm	39 mm

DATA	Recommended trade price in EURO / excluding VAT					
ITEM NO.	20386	20417	20418	20419	20420	20421
PRICE €	493,20	504,50	628,00	785,30	931,40	1088,70
LENGTH	100 m	120 m	150 m	200 m	250 m	300 m
WEIGHT	14,2 kg	16,9 kg	21,3 kg	28,2 kg	35,3 kg	42,3 kg
MATERIAL	Fiberglass core with PP sheath					
ROHR Ø	optimal for 80 - 250 mm					
BREAKINGLOAD	580 kg					
BENDING RADIUS	770 mm					

ADVANTAGES

- ✓ Glass fibre rod total breaking load up to 6200 kg
- ✓ Total breaking load 580 kg
- ✓ Bending radius 770 mm

Recommended tube diameter, bending radius and total breaking load fiberglass rod Ø 11 mm

Ø				
11 mm	80 - 250 mm	770 mm	6200 kg	580 kg

DESCRIPTION

Replacement glass fibre rod Ø 11 mm with stainless steel end sleeve at the beginning and end of the rod - RUNPOTEC RTG Ø 12 mm thread.
Fiberglass rod total breaking load 6200 kg, total breaking load 580 kg.

Optimal application area: for pipe diameters 50 mm - 120 mm

Application video: a short, very informative application video can be viewed by scanning the QR code or on www.runpotec.com.

Scope of delivery: 1 piece of glass fibre rod Ø 11 mm with end sleeves (start/end)

INFORMATION

Suitable fiberglass rod Ø 11 mm (Lengths 100 - 300 Meter)

Fiberglass rod Ø 11 mm:
10092/10093/10094/10095/
10096/10097

[Click here Productinformation](#)

