


DATA SHEET

REPLACEMENT GLASS FIBRE ROD

for steel cage Ø 6 mm

Item no.: 20317 | 20318 | 20319 | 20320







[Click here Video](#)

[Click here Productinformation](#)

Repair instruction

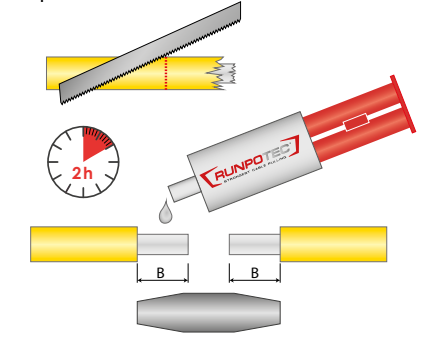
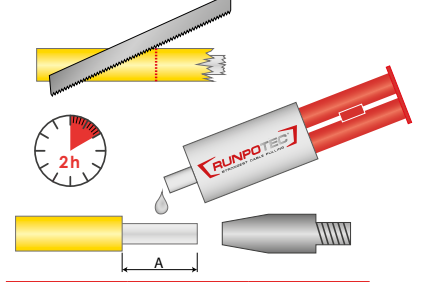


Ø mm	A	B
6 mm	30 mm	16 mm

DATA	Recommended trade price in EURO / excluding VAT			
ITEM NO.	20317	20318	20319	20320
PRICE €	100,00	121,90	139,50	177,10
LENGTH	40 m	50 m	60 m	80 m
TOTAL WEIGHT KG	2,182	2,382	2,582	2,982
DIMENSION MM	L 515 / B 515 / H 65			
MATERIAL	Fiberglass core with PP sheath			
PIPE Ø	optimal for 40 - 100 mm			
TOTAL BREAKING LOAD	320 kg			
BENDING RADIUS	168 mm			

ADVANTAGES

- ✓ Glass fibre rod total breaking load up to 2200 kg
- ✓ Total breaking load 320 kg
- ✓ Bending radius 168 mm

Recommended tube diameter, bending radius and total breaking load fiberglass rod Ø 6 mm

Ø				
6 mm	40 - 100 mm	168 mm	2200 kg	320 kg

DESCRIPTION

Replacement glass fibre rod Ø 6 mm - RUNPOTEC RTG Ø 6 mm thread. Fiberglass rod total breaking load 2200 kg, total breaking load 320 kg.

Optimal field of application: for pipe diameters 40 mm - 100 mm.

Application video: a short, very informative application video can be viewed by scanning the QR code or on www.runpotec.com.

Scope of delivery: 1 piece of glass fibre rod Ø 6 mm with end sleeves (start/end)

INFORMATION

Suitable fiberglass rods Ø 6 mm (Lengths 40 - 80 Meter)

Profi Set Ø 6 mm


10059/10061/10063/10065

Standard Set Ø 6 mm:

10060/10062/10064/10066



[Click here Productinformation](#)



[Click here Productinformation](#)