

# DATA SHEET



## REPLACEMENT GLASS FIBRE ROD

for steel cage Ø 9 mm

Item no.: 20373 | 20374 | 20375 | 20376 | 20377 | 20378 | 20562



### Repair instruction

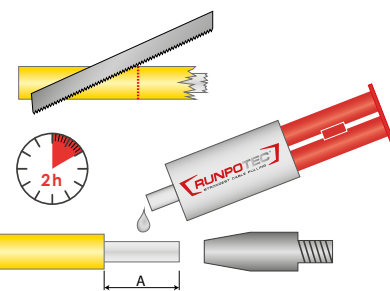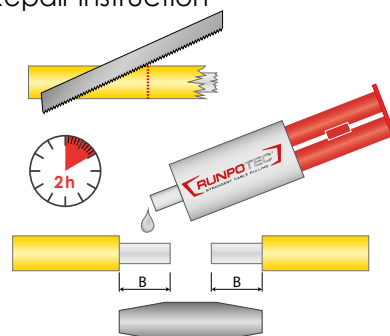

Ø mm	A	B
9 mm	57 mm	29 mm

### DATA

Recommended trade price in EURO / excluding VAT

ITEM NO.	20373	20374	20375	20376	20377	20378	20562
PRICE €	137,10	161,80	187,60	233,70	292,10	330,30	393,80
LENGTH	40 m	50 m	60 m	80 m	100 m	120 m	150 m
WEIGHT	3,8 kg	4,6 kg	5,7 kg	7,5 kg	9,4 kg	11,2 kg	14 kg
MATERIAL	Fiberglass core with PP sheath						
PIPE Ø	optimal for 60 - 200 mm						
BREAKING LOAD	460 kg						
BENDING RADIUS	620 mm						

### ADVANTAGES

- Glass fibre rod total breaking load up to 4500 kg
- Total breaking load 460 kg
- Bending radius 620 mm

### Recommended tube diameter, bending radius and total breaking load Fiberglass rod Ø 9 mm

Ø				
9 mm	60 - 200 mm	620 mm	4500 kg	400 kg

### DESCRIPTION

Replacement glass fibre rod Ø 9 mm with stainless steel end sleeve at the beginning and end of the rod - RUNPOTEC RTG Ø 12 mm thread.  
Glass fibre rod tensile load 4500 kg, total tensile load 460 kg.

**Optimal application area:** for pipe diameters 50 mm - 120 mm

**Application video:** a short, very informative application video can be viewed by scanning the QR code or on [www.runpotec.com](http://www.runpotec.com).

**Scope of delivery:** 1 piece of glass fibre rod Ø 9 mm with end sleeves (start/end)

### INFORMATION

**Suitable fiberglass rod Ø 9 mm (Lengths 40 - 150 Meter)**

**Fiberglass rod Ø 9 mm:**  
10081/10082/10083/10084/  
10085/10086/10110



[Click here Product information](#)