

DATA SHEET

SPARE FIBERGLASS ROD



for POWER REX Ø 3mm

Item no.: **20413** | **20104** | **20105** | **20106**



[Click here Productinformation](#)

Repair instruction:

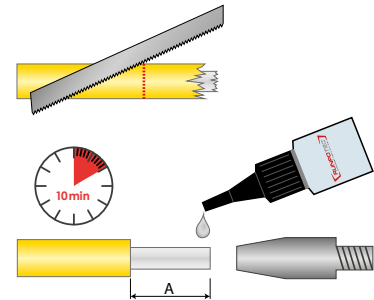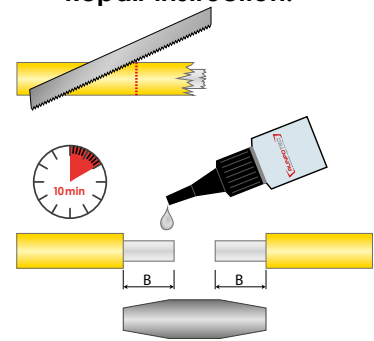

| Ø mm | A | B |
|------|-------|------|
| 3 mm | 12 mm | 7 mm |

| DATA | Recommended trade price in EURO / excluding VAT | | | |
|---------------------|---|---------------|---------------|---------------|
| ITEM NO. | 20413 | 20104 | 20105 | 20106 |
| PRICE € | 39,30 | 52,10 | 57,30 | 63,70 |
| LENGTH | 20 m | 30 m | 40 m | 50 m |
| WEIGHT KG | 0,24 kg | 0,34 kg | 0,45 kg | 0,56 kg |
| MATERIAL | Fiberglass core with PP Sheath | | | |
| TOTAL BREAKING LOAD | 120 kg | | | |
| BENDING RADIUS | 55 mm | | | |
| TUBE DIAMETER Ø | for pipe dimension 16 - 50 mm | | | |
| EAN-CODE | 9120045474008 | 9120045474015 | 9120045474022 | 9120045474039 |

ADVANTAGES

- ✓ Shear stability
- ✓ Also for coated pipes
- ✓ Bending radius 55 mm
- ✓ Total breaking load 120 kg

Recommended tube diameter, bending radius and total breaking load of the POWER REX Ø 3 mm

| | | | | |
|------|----------|-------|--------|--------|
| Ø | | | | |
| 3 mm | 16-50 mm | 55 mm | 450 Kg | 120 Kg |

DESCRIPTION

Replacement glass fibre rod Ø 3 mm with end sleeve made of stainless steel RUNPOTEC RTG Ø 6 mm thread for POWER REX.

The specified total breaking load of 120 kg always refers to the entire product (glass fibre rod including end sleeves).

Optimal field of application: for pipe diameters 16 mm - 50 mm.

Scope of delivery: Replacement glass fibre rod Ø 3 mm incl. end sleeves with RUNPOTEC RTG Ø 6 mm thread

INFORMATION

Suitable accessories:

POWER REX Ø 3 mm
10087/10088/10089/10090

Repair-Kit
20408



[Click here Productinformation](#)



[Click here Productinformation](#)