

# DATA SHEET

## GF9 FIBERGLASS ROAD Ø 9 MM

incl. mobile steel reel, double run-out system, metercounter

Item no.: 10081 | 10082 | 10083 | 10084 | 10085 | 10086 | 10110



**VIDEO**

Fiberglass rod  
Ø 7.5 mm, 9 mm  
and 11 mm



[Click here Video](#)

**BEGINNING:** Shackle, stainless steel with RUNPOTEC RTG Ø 12 mm thread - screwed to strand


**ENDING:** Ending joint, stainless steel with RUNPOTEC RTG Ø 12 mm thread

[Click here Productinformation](#)

### Detailed images:

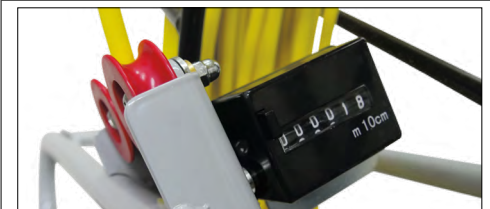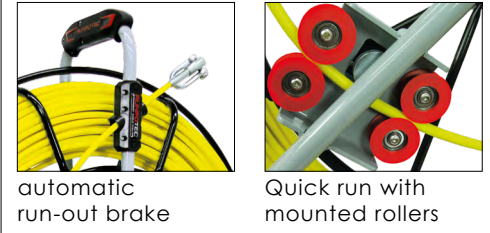

Metercounter

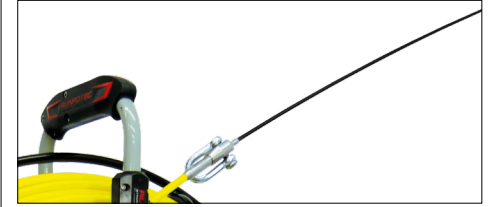

Adaptable leading heads

### DATA

ITEM NO.	10081	10082	10083	10084	10085	10086	10110
LENGTH M.	40 m	50 m	60 m	80 m	100 m	120 m	150 m
LENGTH FT.	131,23	164,04	196,85	262,47	328,08	393,70	492,13
WEIGHT	15,72 kg	16,65 kg	17,58 kg	19,44 kg	21,30 kg	23,16 kg	25,95 kg
MATERIAL	Fiberglass core with PP sheath						
PIPE Ø	for tube diameter 60 - 200 mm						
DIMENSION	L 830 mm x B 400 mm x H 900 mm						

### ADVANTAGES

- ✓ incl. steel reel and metre counter
- ✓ Double run-out system (automatic run-out brake and fast run-out)
- ✓ Additional parking brake
- ✓ Fiberglass rod breaking load 4500 kg
- ✓ Total breaking load 460 kg
- ✓ Bending radius with ending joint 620 mm
- ✓ Bending radius only rod 140 mm

Rod	Rec. pipe diameter	Bending radius	Bending radius rod	Breaking load	Total breaking load
Ø					
9 mm	60 - 200 mm	620 mm	140 mm	4500 kg	460 kg
0,3543 in.	2,3622 - 7,8740 in.	24,4094 in.	5,5118 in.	9921 lbs.	1014 lbs.

### DESCRIPTION

Cable puller fiberglass rod (duct rodders) Ø 9 mm - RUNPOTEC RTG Ø 12 mm thread with robust steel reel (CDP/powder coated) Ø 730 mm incl. new double run-out system (automatic run-out brake and fast run-out), additional parking brake. The shackle also has a transition thread to RTG Ø 6 mm to adapt various guide rods (RUNPOSTICKS), guide probes, cable pulling grip (sock), multifunction camera RC 2 and the like. Fiberglass rod breaking load 4500 kg, total breaking load 460 kg.

**Optimal field of application:** for pipe diameters 60 mm - 200 mm

Application video: a short, very informative application video can be viewed by scanning the QR code or on [www.RUNPOTEC.com](http://www.RUNPOTEC.com).

**Scope of supply:** 1 x GF9 fiberglass rod Ø 9 mm, ending joint with RUNPOTEC thread Ø 12 mm on both sides (start/end), 1 x mobile steel reel Ø 730 mm incl. double run-out system, 1 x metercounter, 1 x shackle

### INFORMATION

**Compatible with:**  
**RUNPOCAM RC2**  
 Length: 10 m | 30 m | 50 m  
 Item no. 10139 | 10140 | 10141



[Click here Productinformation](#)