

DATA SHEET


MOUNTING-WRENCH SET GF3

for guiding head with kink protection (2 pieces)


Item no.: 20825





VIDEO




GF3

Click here Video 




Click here Productinformation 


Fiberglass rod for
Coupling joint/
Calibrate adhesive sleeve

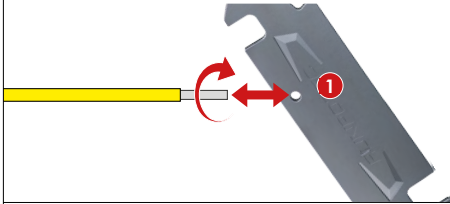

Easy service opening



Screw tight or connect

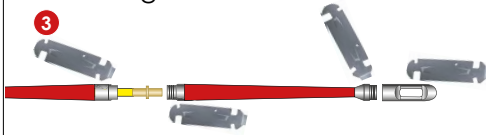

DATA	
ITEM NO	20825
WEIGHT KG	0,029 kg
DIMENSION	L 75 x B 40 x H 2,5 mm
MATERIAL	Stainless steel
EAN-CODE	9120045477252

ADVANTAGE

- ✓ Sparepart for GF3 glass fibre rods
- ✓ Stainless steel
- ✓ Calibrating hole for fibreglass ①
- ✓ Easy service opening GF3 ②
- ✓ For tightening and loosening guiding head with kink protection ③
- ✓ For tightening eyelet with front thread

DESCRIPTION

Mounting wrench set GF3 spare for GF3 glass fibre rod \varnothing 3 mm. Optimal for screwing the kink protection and guiding head tightly together or for firmly connecting the eyelet to the guiding head. Also has a calibration hole for the glass fibre rod for optimum adaptation to the brass adhesive joints.

Application film: You can watch a short, very informative application film by scanning the QR code or at www.runpotec.com.

Scope of supply: 2 x mounting wrenches, stainless steel


INFORMATION

USE WITH:

Cable pulling system GF 3

Length: 20 m | 30m | 50m
Item no 10192 | 10193 | 10195



Click here Productinformation 

Replacement Fiberglass rod GF 3 \varnothing 3 mm:

Length: 20 m | 30m | 50m
Item no 20816 | 20817 | 20818



Click here Productinformation 