

DATA SHEET



REPLACEMENT GLASS FIBRE ROD

for steel cage Ø 15 mm


Item no.: 20491 | 20492 | 20493 | 20494 | 20495 | 20496



Repair instruction:

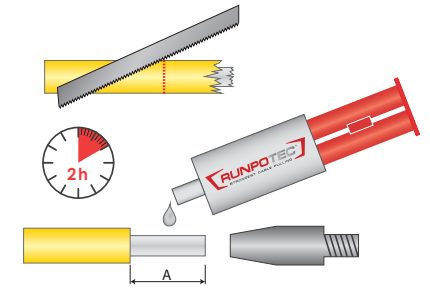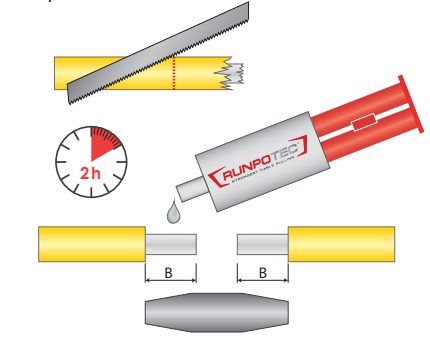

Ø mm	A	B
15 mm	80 mm	50 mm



DATA

ITEM NO.	20491	20492	20493	20494	20495	20496
LENGTH	150 m	200 m	250 m	300 m	350 m	400 m
WEIGHT	41,7	55,5	69,5	83,3	97,2	111,4
DIMENSION	L 1300 x B 1300 x H 1800 mm					
MATERIAL	Fiberglass core with PP sheath					
PIPE Ø	optimal for 180 - 450 mm					
BREAKING LOAD	690 kg					
BENDING RADIUS	1200 mm					
EAN CODE	see www.runpotec.com					

ADVANTAGES

- ✓ Glass fibre rod total breaking load up to 14500 kg
- ✓ Total breaking load 690 kg
- ✓ Bending radius 1200 mm

Recommended tube diameter, bending radius and total breaking load fibreglass rod Ø 15 mm

Ø	Tube diameter	Bending radius R	Breaking load (rod)	Breaking load (with sleeve)
15 mm	180 - 450 mm	1200 mm	14.500 kg	690 kg

DESCRIPTION

Replacement glass fibre rod Ø 15 mm with stainless steel end sleeve at the beginning and end of the rod - RUNPOTEC RTG Ø 12 mm thread. Glass fibre rod - total breaking load 14500 kg, total breaking load 690 kg
Optimal application area: for pipe diameters 180 mm - 450 mm
Scope of delivery: 1 piece of glass fibre rod Ø 15 mm with end sleeves (start/end)

INFORMATION

Suitable fibreglass rod Ø 15 mm (Lengths 150 - 400 Meter)

Fibreglass rod Ø 15 mm:
 10099/10100/10101/10102/
 10103/10104

Click here Productinformation

