

CONNECTION SWIRL with swivel

for horizontal cable pulling with the CW 800 E capstan winch

Item no.: **10176**

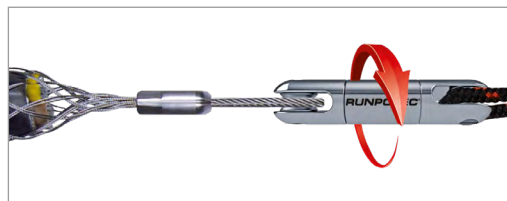
VIDEO

CW 800 E
Spillwinde

Click here Video

Click here
Product information

Application images:

**DATA**

Recommended trade price in EURO / excluding VAT

ITEM NO.	10176
PRICE €	€ 196,00
WEIGHT	0,502 kg
DIMENSION	L 132 mm x DM 30 mm
MATERIAL	Stainless steel
FORK Ø	12 mm
TENSILE LOAD	1500 kg
EAN-CODE	9120045475999

ADVANTAGES

- Stainless steel
- Corrosion free
- High quality ball bearings
- Top price - performance ratio
- Tensile load 1500 kg

DESCRIPTION

The connecting swivel is used to connect RUNPOTEC polyester pull ropes to the cables to be pulled or the pulling head used and to compensate for twisting. Ideally suited for use in combination with the RUNPOTEC CW 800 E capstan winch. Made of stainless steel with high-quality ball bearings, the RUNPOTEC connecting swivel is completely corrosion-free, making it one of the highest-quality products on the market. Max. tensile load 1500 kg. Safety note: Not suitable for vertical cable pulling, must not be used to carry or lift loads or persons.

Optimal field of application: for horizontal cable pulling in combination with the CW 800 E capstan winch.

Application video: a short, very informative application video can be viewed by scanning the QR code or on www.RUNPOTEC.com.

Scope of supply: 1x Connecting swivel with twist adjustment

INFORMATION

Related pulling system

**CW 800 E Capstan winch
incl. Trolley**

Item no.: 10138

Click here
Product information

**CW 800 E Capstan winch
without Trolley**

Item no. 10148

Click here
Product information