

GF11 Replacement fiberglass rod Ø 11 mm

Cable pulling system for pipe diameter 80–250 mm

Item no.: 20386 | 20417 | 20418 | 20419 | 20420 | 20421

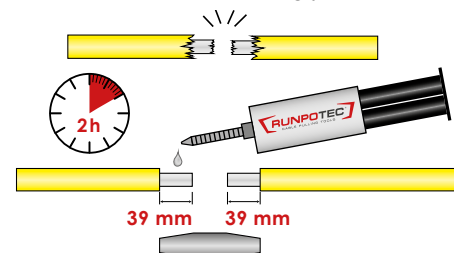


GF11

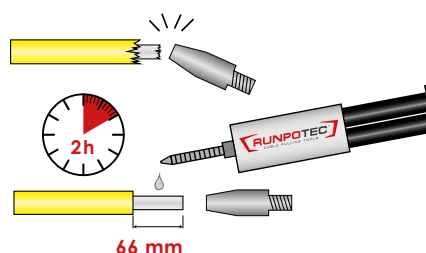
Click here Video




Click here
Productinformation

Repair instruction coupling joint



Repair instruction ending joint



Rod	Rec. pipe diameter	Bending radius	Bending radius rod	Breaking load	Total breaking load
Ø 11 mm					
11 mm	80 - 250 mm	770 mm	210 mm	6200 kg	580 kg

DATA

Recommended trade price in EURO / excluding VAT

ITEM NO.:	20386	20417	20418	20419	20420	20421
PRICE €	523,00	535,00	665,00	832,00	983,00	1144,00
LENGTH	100 m	120 m	150 m	200 m	250 m	300 m
WEIGHT	13,50 kg	16,20 kg	20,25 kg	27,00 kg	33,75 kg	40,50 kg
MATERIAL ROD	Fiberglass core with PP sheath					
BENDING RADIUS	770 mm					
PIPE Ø	optimal from 80 - 250 mm					
DIMENSION	H 240 mm x DM 1000 mm					
TOTAL BREAKING LOAD	580 kg					

DESCRIPTION

The GF11 replacement fiberglass rod Ø 11 mm is equipped with end sleeves on both sides and has an RTG thread Ø 12 mm. The breaking load of the fiberglass rod is 6200 kg, the total breaking load is 580 kg. The bending radius with sleeve is 770 mm.

Optimal field of application: for pipe diameters 50 mm - 120 mm

Application video: a short, very informative application video can be viewed by scanning the QR code or on www.RUNPOTEC.com.

Scope of supply: 1 x GF11 Replacement fiberglass rod Ø 11 mm, ending joint on both sides (start/end)

ADVANTAGES

- Fiberglass rod breaking load 6200 kg
- Total breaking load 580 kg
- Bending radius with ending joint 770 mm
- Bending radius only rod 210 mm
- Pipe diameter 80 - 250 mm

INFORMATION

Suitable products:

GF11 Fiberglass rod Ø 11 mm

- 100 m - Item no.: 10092
- 120 m - Item no.: 10093
- 150 m - Item no.: 10094
- 200 m - Item no.: 10095
- 250 m - Item no.: 10096
- 300 m - Item no.: 10097

Click here
Productinformation**GF11 Repairing Kit**

Item no.: 20424

Click here
Productinformation