

GF3 Replacement fiberglass rod Ø 3 mm

Cable pulling system for pipe diameter 10–50 mm

Item no.: **20816** | **20817** | **20818**

VIDEO

GF3

Click here Video

KG 130

Click here Productinformation

Front End: Guiding head with swivel and RTG Ø 6 mm front thread with kink-protection

Rear end: Kink protection with RTG Ø 6 mm inner thread

Achtung! Stromleitend

Repair instruction

Rod	rec. pipe ID	Bending radius w.e. joint	Bending radius rod	Breaking load	Total breaking load
Ø					
3 mm	9 – 45 mm	38 mm	28 mm	450 kg	130 kg

DATA		Recommended trade price in EURO / excluding VAT	
ITEM NO.	20816	20817	20818
PRICE €	€ 46,50	€ 54,60	€ 66,00
LENGTH	20 m	30 m	50 m
WEIGHT	0,25 kg	0,35 kg	0,55 kg
MATERIAL ROD	Fiberglass core with PP sheath		
BENDING RADIUS	38 mm		
PIPE INNER Ø	optimal from 9 mm - 45 mm		
DIMENSION	H: 30 mm, Ø 400 mm		
EAN CODE	9120045477184	9120045477191	9120045477207

DESCRIPTION

Replacement glass fibre rod GF3 Ø 3 mm with kink protection ending joint made of stainless steel and guiding head with twist adjustment and pulling eye Ø 7 mm with RTG Ø 6 mm thread. The specified total breaking load of 130 kg always refers to the entire product (glass fibre rod incl. kink protection ending joints).

Optimal field of application: for pipe inner dimension 9 mm - 45 mm.

Scope of supply: 1 x Replacement glass fibre rod GF3 Ø 3 mm, kink-protection-ending joint on both side (Beginning/ Ending), 1 x guiding head with twist adjustment, 1 x pulling eye Ø 7 mm, 2 x mounting-wrenches

ADVANTAGES

- Guiding head with swivel and kink protection
- Shear-stable
- Also for occupied pipes
- Bending radius 38 mm
- Total breaking load 130 kg

INFORMATION**Matching products****GF3 Cable pulling system**


20 m - Item no.: 10192

30 m - Item no.: 10193

50 m - Art.-Nr.: 10195

**GF3 Repairing Kit**

Item no.: 20819

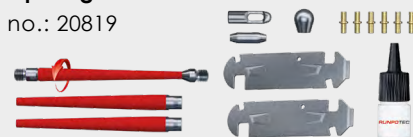

Click here Productinformation