

GF4.5 Replacement fiberglass rod Ø 4,5 mm

Cable pulling system for pipe diameter 30–80 mm

Item no.: 20311 | 20312 | 20313 | 20314 | 20315




VIDEO




GF4.5


Click here Video

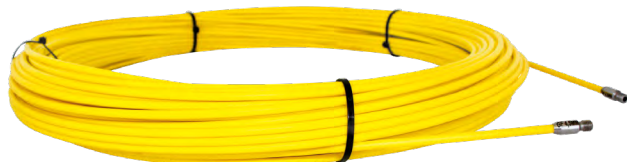

Repair instruction coupling joint

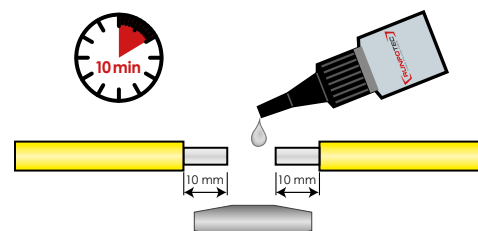

Repair instruction ending joint

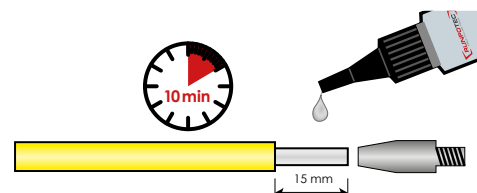Click here
Productinformation

Rod	Rec. pipe diameter	Bending radius	Bending radius rod	Breaking load	Total breaking load
Ø					
4,5 mm	30 - 80 mm	120 mm	55 mm	1300 kg	220 kg

DATA

Recommended trade price in EURO / excluding VAT

ITEM NO.:	20311	20312	20313	20314	20315
PRICE €	€ 82,00	€ 97,00	€ 113,00	€ 131,00	€ 162,00
LENGTH	30 m	40 m	50 m	60 m	80 m
WEIGHT	0,72 kg	0,96 kg	1,20 kg	1,44 kg	1,92 kg
MATERIAL ROD	Fiberglass core with PP sheath				
BENDING RADIUS	120 mm				
PIPE Ø	optimal from 30 - 80 mm				
DIMENSION	H 80 mm x DM 330 mm				
TOTAL BREAKING LOAD	220 kg				

DESCRIPTION

„The GF4.5 replacement fiberglass rod Ø 4.5 mm is equipped with end sleeves on both sides and has an RTG thread Ø 6 mm. The breaking load of the fiberglass rod is 1300 kg, the total breaking load is 220 kg. The bending radius with sleeve is 120 mm.

Optimal field of application: for pipe diameters 30 mm - 80 mm.

Application video: a short, very informative application video can be viewed by scanning the QR code or on www.RUNPOTEC.com.

Scope of supply: 1 x GF4.5 Replacement fiberglass rod Ø 4,5 mm, ending joint on both sides (start/end)

ADVANTAGES

- Fiberglass rod breaking load 1300 kg
- Total breaking load 220 kg
- Bending radius with ending joint 120 mm
- Bending radius only rod 55 mm
- Pipe diameter 30 - 80 mm

INFORMATION

Suitable products:

GF4.5 Fiberglass rod Profi-Set

30 m - Item no.: 10052
40 m - Item no.: 10055
50 m - Item no.: 10057
60 m - Item no.: 10047
80 m - Item no.: 10050

Click here
Productinformation**GF4.5 Fiberglass rod Standard-Set**

30 m - Item no.: 10054
40 m - Item no.: 10056
50 m - Item no.: 10058
60 m - Item no.: 10048
80 m - Item no.: 10051

Click here
Productinformation**GF4.5 Repairing Kit**

Item no.: 20250

Click here
Productinformation