

GF6 Replacement fiberglass rod Ø 6 mm

Cable pulling system for pipe diameter 40–100 mm

Item no.: 20317 | 20318 | 20319 | 20320





VIDEO

GF6

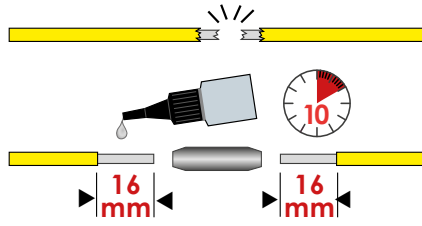
Click here Video



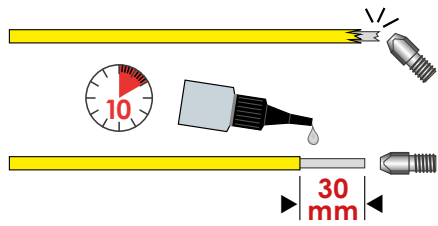






Click here Productinformation

Repair instruction coupling joint



Repair instruction ending joint



Rod	Rec. pipe diameter	Bending radius	Bending radius rod	Breaking load	Total breaking load
Ø 6 mm					
6 mm	40 - 100 mm	168 mm	80 mm	2200 kg	320 kg

DATA

Recommended trade price in EURO / excluding VAT

ITEM NO.:	20317	20318	20319	20320
PRICE €	€ 106,00	€ 129,00	€ 148,00	€ 188,00
LENGTH	40 m	50 m	60 m	80 m
WEIGHT	1,6 kg	2,00 kg	2,40 kg	3,20 kg
MATERIAL ROD	Fiberglass core with PP sheath			
BENDING RADIUS	168 mm			
PIPE Ø	optimal from 40 - 100 mm			
DIMENSION	H 40 mm x DM 730 mm			
TOTAL BREAKING LOAD	320 kg			

DESCRIPTION

The GF6 replacement fiberglass rod Ø 6 mm is equipped with end sleeves on both sides and has an RTG thread Ø 6 mm. The breaking load of the fiberglass rod is 2200 kg, the total breaking load is 320 kg. The bending radius with sleeve is 168 mm.

Optimal field of application: for pipe diameters 40 mm - 100 mm.

Application video: a short, very informative application video can be viewed by scanning the QR code or on www.RUNPOTEC.com.

Scope of supply: 1 x GF6 Replacement fiberglass rod Ø 6 mm, ending joint on both sides (start/end)

ADVANTAGES

- Fiberglass rod breaking load 2200 kg
- Total breaking load 320 kg
- Bending radius with ending joint 168 mm
- Bending radius only rod 80 mm
- Pipe diameter 40 - 100 mm

INFORMATION

Suitable products:

GF6 Fiberglass rod Profi-Set

40 m - Item no.: 10059
 50 m - Item no.: 10061
 60 m - Item no.: 10063
 80 m - Item no.: 10065



Click here
Productinformation

GF6 Fiberglass rod Standard-Set

40 m - Item no.: 10060
 50 m - Item no.: 10062
 60 m - Item no.: 10064
 80 m - Item no.: 10066



Click here
Productinformation

GF6 Repairing Kit

Item no.: 20252



Click here
Productinformation