

GF9 Replacement fiberglass rod Ø 9 mm

Cable pulling system for pipe diameter 60–200 mm

Item no.: 20373 | 20374 | 20375 | 20376 | 20377 | 20378 | 20515



VIDEO




GF7.5 / GF9


Click here Video

Click here
Productinformation

Repair instruction coupling joint

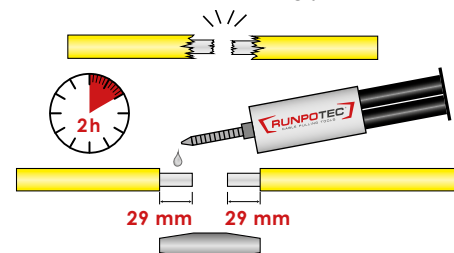

Repair instruction ending joint

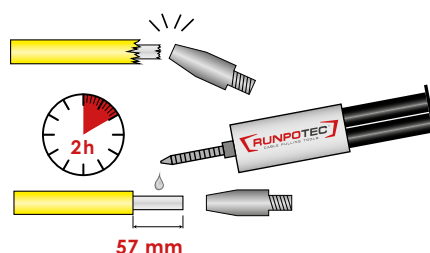

Rod	Rec. pipe diameter	Bending radius	Bending radius rod	Breaking load	Total breaking load
Ø					
9 mm	60 - 200 mm	620 mm	140 mm	4500 kg	460 kg

DATA

Recommended trade price in EURO / excluding VAT

ITEM NO.:	20373	20374	20375	20376	20377	20378	20562
PRICE €	144,00	171,00	199,00	247,00	309,00	350,00	416,00
LENGTH	40 m	50 m	60 m	80 m	100 m	120 m	150 m
WEIGHT	3,72 kg	4,65 kg	5,58 kg	7,44 kg	9,30 kg	11,16 kg	13,95 kg
MATERIAL ROD	Fiberglass core with PP sheath						
BENDING RADIUS	620 mm						
PIPE Ø	optimal from 60 - 200 mm						
DIMENSION	H 110 mm x DM 730 mm						
TOTAL BREAKING LOAD	460 kg						

DESCRIPTION

The GF9 replacement fiberglass rod Ø 9 mm is equipped with end sleeves on both sides and has an RTG thread Ø 12 mm. The breaking load of the fiberglass rod is 4500 kg, the total breaking load is 460 kg. The bending radius with sleeve is 620 mm.

Optimal field of application: for pipe diameters 60 mm - 200 mm

Application video: a short, very informative application video can be viewed by scanning the QR code or on www.RUNPOTEC.com.

Scope of supply: 1 x GF9 Replacement fiberglass rod Ø 9 mm, ending joint on both sides (start/end)

ADVANTAGES

- Fiberglass rod breaking load 4500 kg
- Total breaking load 460 kg
- Bending radius with ending joint 620 mm
- Bending radius only rod 140 mm
- Pipe diameter 60 - 200 mm

INFORMATION

Suitable products:

GF9 Fiberglass rod Ø 9 mm

- 40 m - Item no.: 10081
- 50 m - Item no.: 10082
- 60 m - Item no.: 10083
- 80 m - Item no.: 10084
- 100 m - Item no.: 10085
- 120 m - Item no.: 10086
- 150 m - Item no.: 10110

Click here
Productinformation**GF9 Repairing Kit**

Item no.: 20385

Click here
Productinformation