

Anfangsbirne Ø 20 mm

für RUNPOTEC Produkte mit THREAD RTG Ø 12 mm inkl. VerbindungsTHREAD


Item no.: **20409**

VIDEO



GF7.5-GF11

Click here Video

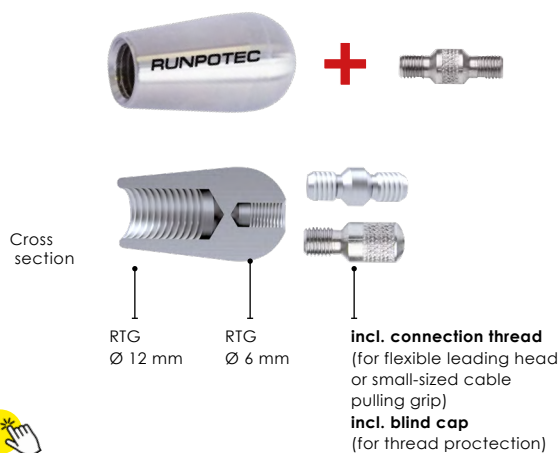

Application images



Can be adapted to roller, shackle and starting head Ø 20 mm, Ø 30 mm



DATA

Recommended trade price in EURO / excluding VAT

ITEM NO.	20409
PRICE €	€ 23,70
WEIGHT	0,062 kg
DIMENSION	L 47 mm x B 29 mm x DM 20 mm
THREAD	RTG Ø 12 mm
MATERIAL	Stainless steel
EAN-CODE	9120045474411

DESCRIPTION

Starting head Ø 20 mm made of stainless steel for fiberglass rod Ø 7.5 mm, 9 mm, 11 mm, 15 mm - RTG Ø 12 mm thread. The starting head has an additional transition thread to RTG Ø 6 mm to adapt various guide rods (RUNPOSTICKS), guide probes, cable pulling grip (sock) etc.

Scope of supply: 1 x Starting head Ø 20 mm with thread RTG Ø 12 mm, 1x connection thread RTG Ø 6 mm

ADVANTAGES

- Thread RTG Ø 12 mm
- For guide probe or smaller cable pulling grips
- Incl. connecting thread
- Stainless steel
- Leanest head

INFORMATION

Compatible with:

Glasfaserstäbe:

**GF7.5, GF9,
GF11, GF15**
Click here
Productinformation