

Anfangsbirne Ø 30 mm

für RUNPOTEC Produkte mit THREAD RTG Ø 12 mm inkl. VerbindungsTHREAD


Item no.: **20404**

VIDEO



GF7.5-GF11

Click here Video

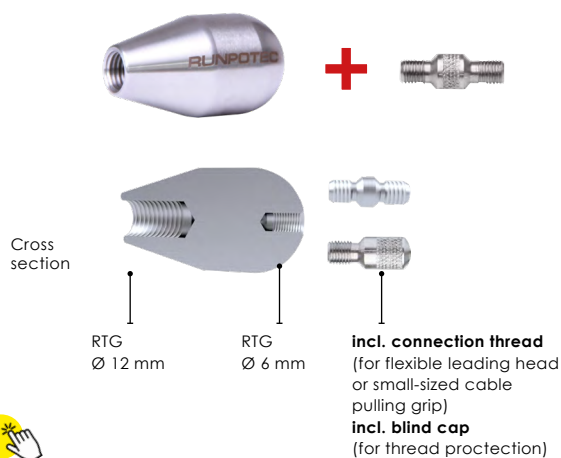

Application images



Can be adapted to roller, shackle and starting head Ø 20 mm, Ø 30 mm



DATA

Recommended trade price in EURO / excluding VAT

ITEM NO.	20404
PRICE €	€ 25,80
WEIGHT	0,207 kg
DIMENSION	L 65 mm x B 38 mm x DM 30 mm
THREAD	RTG Ø 12 mm
MATERIAL	Stainless steel
EAN-CODE	9120045474398

DESCRIPTION

Starting head Ø 30 mm made of stainless steel for fiberglass rod GF7.5 - GF15 - RTG Ø 12 mm thread. The starting head has an additional transition thread to RTG Ø 6 mm to adapt various guide rods (RUNPOSTICKS), guide probes, cable pulling grip (sock) etc.

Scope of supply: 1 x Starting head Ø 30 mm with thread RTG Ø 12 mm, 1x connection thread RTG Ø 6 mm

ADVANTAGES

- RUNPOTEC RTG Ø 12 mm
- For guide probe or smaller cable pulling grips
- Incl. connecting thread
- Stainless steel
- Leanest head

INFORMATION

Compatible with:

Fiberglass rods:

GF7.5, GF9, GF11, GF15

Click here Productinformation