

GF3 Guiding head with kink protection

for Ø 3 mm fiberglass rod, 5-parts


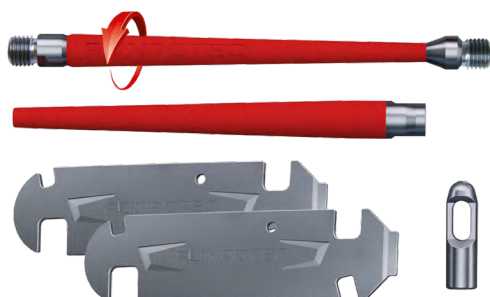
Item no.: **20826**

VIDEO



GF3


Click here Video

Click here
Productinformation

Stowable in accessory box

*Sample image -
Box not included

Application - Extreme bending radius

**DATA**

Recommended trade price in EURO / excluding VAT

ITEM NO.	20826
PRICE €	€ 30,50
WEIGHT KG	0,0416 kg
DIMENSION	L x 100 mm x B 28 mm x H 8 mm
MATERIAL	Stainless-Steel
EAN-CODE	9120045477283

ADVANTAGES

- With swivel and kink protection
- Breaking load 140 kg
- Stainless steel
- Extra large eyelet

DESCRIPTION

The patented guiding head (external thread RTG Ø 6 mm) with twist adjustment is optimally suited for the GF3 glass fibre rod Ø 3 mm. The newly developed kink protection makes it possible to overcome bending radii up to $R = 38$ mm. An extra large eyelet hole of the enclosed pulling eye ensures a higher cable capacity of up to 7×2.5 mm². The mounting wrench can be used to tighten or loosen the guiding head with kink protection. Stainless steel

Application film: You can watch a short, very informative application film by scanning the QR code or at www.runpotech.com.

Scope of supply: 1 x guiding head with twist adjustment, 1 x kink protection, 2 x mounting wrenches, 1 x pulling eye Ø 7 mm

INFORMATION

Use with:

GF3 Cable pulling system

20 m - Item no.: 10192

30 m - Item no.: 10193

50 m - Item no.: 10195

Click here
Productinformation**GF3 Replacement fiberglass rod Ø 3 mm**

20 m - Item no.: 20816

30 m - Item no.: 20817

50 m - Item no.: 20818

Click here
Productinformation